

10 Ports Full Gigabit PoE Switch with 2*SFP slot

8*1000M POE+2*GF SFP PoE Switch



- 8*10/100/1000M + 2*1000M SFP slot PoE Switch, 1-8 ports support IEEE 802.3af/at;
- The way of "cutting" PoE port if total PoE budget will be exceeded, from largest to smallest (number).
- **Support to Watch dog, Priority port, Port self-healing, VLAN, 250meter distance, Reduce the after-resale.**
- PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- Switching capacity:20Gbps, MAC table:8K;
- The power supply total is 120W;
- 2 years warranty.

Introduction.


The PR-P08FG1 series is a gigabit unmanaged Fiber PoE switch. It has 10*10/100/1000Base-T RJ45 ports. Port 1-8 can support IEEE 802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 120W(at-250W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom, etc. through a network cable to meet the network environment that needs high-density PoE power supply. It is suitable for hotels, campuses, parks, shopping malls, scenic spots, hospitals, factory dormitory and small and medium-sized enterprise.

TECHNICAL SPECIFICATION

Model	PR-P08FG1
Fixed Port	8*10/100/1000Base-TX PoE ports (Data/Power) 2*10/100/1000Base-T Uplink SFP slot (Data)
POE Port	Port 1-8 support PoE @ IEEE802.3af/at
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3x
PoE Standard	IEEE802.3af/at
Ethernet Port Feature	10/100Base-T(X) 10/100/1000 Base-T automatic detection, full/half Duplex MDI/MDI-X adaptive
Fiber Port Feature	Store and Forward (Full Wire Speed)
Switching Capacity	20Gbps
Forwarding Mode	14.88Mpps
MAC	8K
Buffer Memory	4M
Twisted Pair Transmission	10BASE-T: Cat5 UTP (≤250 meter) 100BASE-TX: Cat5 or later UTP (≤100 meter)
Power Supply Pin	Default 1/2(+), 3/6(-); Optional 4/5(+), 7/8(-)
MAX / AVERAGE Power Per Port	30W/15.4W
Total PWR / Input Voltage	120W (52VDC)
Power Consumption	Standby:<6W; Full load:<120W
LED Indicator	Power indicator: PWR (green); Network indicator: 1-16/G1-2 (green); POE indicator: PoE (green)
Power Supply	External power adapter
Operation TEMP / Humidity	-20~+55°C:5%~90% RH non condensing

Storage TEMP / Humidity	-40~+75°C;5%~95% RH non condensing
Dimension	191*105*29mm
Net /Gross Weight	<0.6kg / <1.2kg
Installation Method	desktop type, wall mounted
Port lightning protection / protection level	Port lightning protection: 4KV 8/20us; Protection level: IP30
Warranty	2 years

DIMENSION _____

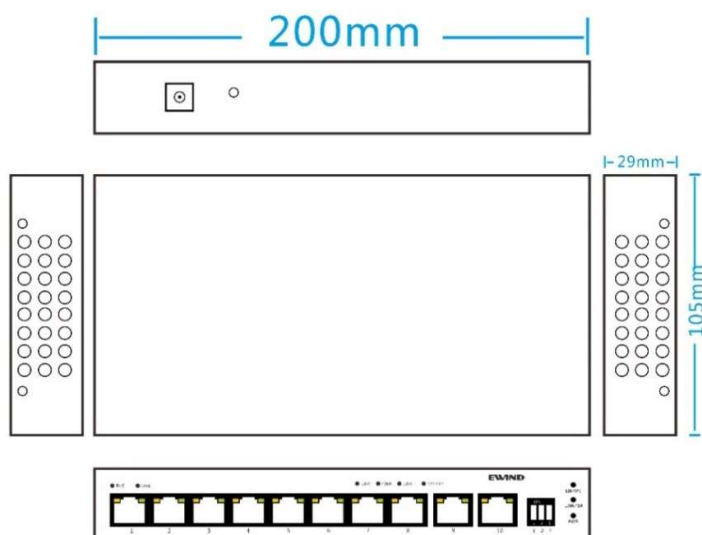

PACKING LIST

CONTENT	QTY	UNIT
10 Ports Full Giga PoE Switch with 2*Giga SFP (PR-P08FG1)	1	SET
User Guide	1	PC
Warranty Card	1	PC