

UNC-D516-H1



Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable


Specifications

| Model | UNC-D516-H1 |
|-------------------------------|--|
| Video/Audio Input | |
| Analog Video Input | 16-ch, BNC |
| IP Video Input | 8-ch(only IP up to 16ch), each channel up to 8MP |
| Supported Analog Camera Types | <p>Support AHD input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps</p> <p>Support TVI input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps</p> <p>Support CVI input: 1080P@30fps 720P@30fps</p> <p>Support CVBS input</p> |

| | | |
|---------------------------|--|--------------------|
| Audio Input | 1-ch, RCA | |
| Network | | |
| Incoming Bandwidth | 40Mbps (up to 56Mbps after all analog camera conversion) | |
| Outgoing Bandwidth | 64Mbps | |
| Remote Users | 128 | |
| Protocols | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE | |
| Video/Audio Output | | |
| VGA Output | 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz | |
| HDMI Output | 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz | |
| Audio Output | 1-ch, RCA | |
| Two-way Audio | 1-ch, RCA | |
| Synchronous Playback | 16-ch | |
| Encoding | | |
| Recording Resolution | 5MP Lite/4MP Lite /1080P/1080P Lite/720P/D1/CIF | |
| Recording Frame Rate | Main stream: | Sub stream: |
| | 5MP Lite@6fps | D1@6fps |
| | 4MP Lite@8fps | D1@8fps |
| | 1080P Lite@15fps | D1@6fps |
| | 720P@15fps | D1@10fps |
| Hard Disk | | |
| SATA | 1 SATA interface | |
| Capacity | Up to 6TB for each HDD | |
| External Interface | | |
| Network Interface | 1 RJ45 10M/100M self-adaptive Ethernet Interface | |
| USB Interface | Rear panel: 2 x USB2.0 | |
| Serial Interface | 1 x RS485 | |
| General | | |
| Power Supply | 12V DC Power Consumption: ≤ 10 W(without HDD) | |
| Working Environment | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing) | |

| | |
|---------------------------|--|
| Dimensions(W×D×H) | 260mm ×240mm× 46mm (10.2" × 9.4"×1.8") |
| Weight (without HDD) | ≤1.1 Kg (2.42lb) |

Dimensions

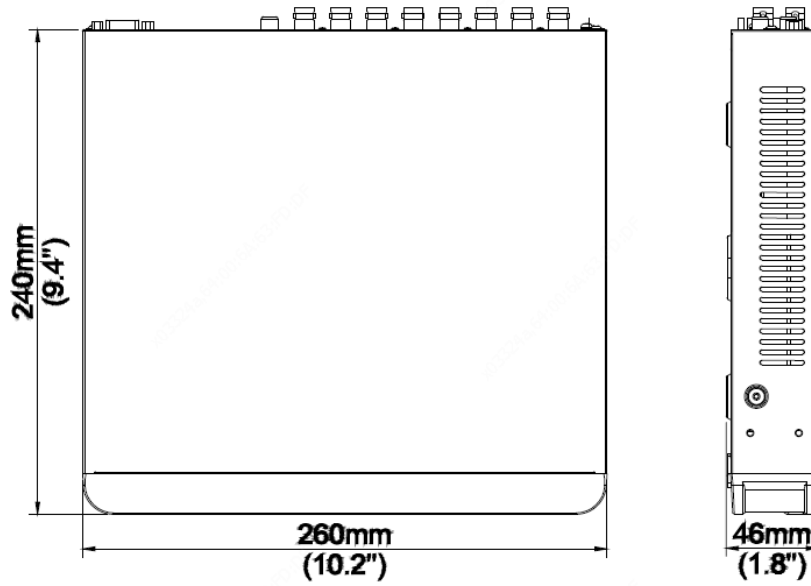

Rear Panel

